

CHATHAM COUNTY PURCHASING & CONTRACTING DEPARTMENT

ADDENDUM NO. 1 TO 12-0014-4

FOR: LAROCHE AVENUE CULVERT

PLEASE SEE THE FOLLOWING FOR ADDITIONS, CLARIFICATIONS AND/OR CHANGES:


SEE ATTACHED SHEET (1) FOR RESPONSES TO QUESTIONS RECEIVED.

NOTE: The Georgia DNR Letter of Permission and the USACE Permit are available on the Purchasing website: <http://purchsing.chathamcounty.org>

THE PROPOSALS REMAIN DUE: 2PM, MARCH 21, 2012

THE PROPOSER IS RESPONSIBLE FOR MAKING THE NECESSARY CHANGES AND MUST ACKNOWLEDGE RECEIPT OF ADDENDUM.

3-13-12
DATE

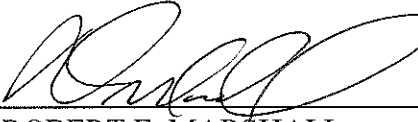

ROBERT E. MARSHALL
SENIOR PROCUREMENT SPECIALIST
CHATHAM COUNTY

RESPONSE TO REQUEST FOR INFORMATION

TO: All Plan Holders

PROJECT: LaRoche Avenue Culvert Replacement
Bid No. 12-0014-4

SUBJECT: Response to RFI #001

SPEC. SECTION: _____
DRAWING NO: _____
OTHER: _____

COMMENTS:

Bidder's Question:

1. Detail C2 on Sheet Number C-301 "Typical Section & Elevations" call for compacted subgrade, how can the subgrade be compacted if the material is natural mud along the bottom of the channel?

Revise detail to read "EXISTING SUBGRADE, TYP".

2. Concern was raised for work within the cyclical tide ranges during the five month construction period.

There are approximately 30-cubic yards of concrete that are to be poured below the mean low tide elevation. To the maximum extent possible, this work should be performed around the tide cycle in combination with removable sand bags and use of the specified anti-washout admixture. Steel must be washed off with freshwater before placement of concrete. Calcium Nitrite shall be used during placement of concrete. For the concrete sheet pile wall pile cap, a seven-day wet set may be substituted.


3. Please clarify the PDA requirements for the concrete sheet pile installation.

The sheet pile will not require a PDA.

4. Please specify the depth and size of pre-drill used for the concrete sheet pile.

Contractor may pre-drill to the specified tip elevation using a drill size not to exceed 10-inches in diameter.

REVIEW PROCESS:

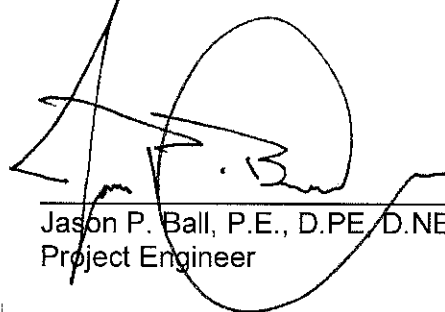

Jason P. Ball, P.E., D.PE, D.NE
Project Engineer

March 12, 2012
Date

This form is to be utilized for the clarification and

the Contract Documents.

Moffatt & Nichol
2 East Bryan Street, Suite 501
Savannah, Georgia 31401

PHONE (912) 231-0044
FAX: (912) 231-0046