

**CHATHAM COUNTY PURCHASING DEPARTMENT**

**ADDENDUM NO. 1 FOR BID NO. 13-0085-3**

---

**REBUILD FRANK SPENCER FISHING PIER FOR CHATHAM COUNTY  
PUBLIC WORKS AND PARK SERVICES**

---

**Please note that the Due Date for the Bid has not changed**

**Questions received;**

**Q1. Please clarify stringer size.**

A1. Detail 2 and 3 are correct indicating the 2 x 10 exterior stringers.

**Q2. The drawing calls for new cross bracing at each bent; it does not say anything about braces going in the long direction of the pier. Should these be left in place or replaced as well?**

A2. New cross bracing at each bent only. The long bracing on the pier to remain.

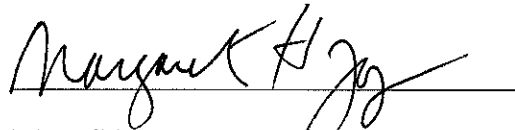
**Q3. The plans call for No. 1 lumber for stringers and select structural for decking and handrails. Will you accept SYP No. 1 for all lumber?**

A3. SYP No. 1 is acceptable for all lumber provided Contractor culls material delivered to install best quality of material on decking and handrail system.

**Q4. The plans call for treatment of decking and handrails with CCA 0.60. Should this be changed to a non arsenic treatment?**

A4. The decking and handrails specification allow for CCA or ACQ. ACQ is preferred for decking and handrails.

10/1/13  
DATE

  
MARGARET H. JOYNER  
PURCHASING AGENT  
CHATHAM COUNTY, GEORGIA